



윌로 심정용 펌프 솔루션

Wilo-PSB4-L Series




용도

- 지하수용 및 가압용
- 농업용 : 관정, 농장, 양어장, 대형온실 등
- 급수용 : 고층빌딩, 호텔, 학교, 병원, 아파트 등

특장점

- 제품 세분화로 기존 대비 다양해진 라인업
- 심정용 포장 박스 재질 강화
- 헤드 & 베이스부 Stainless Steel 재질 적용
- 기존 윌로 심정용 모터와 뛰어난 호환성

외형도

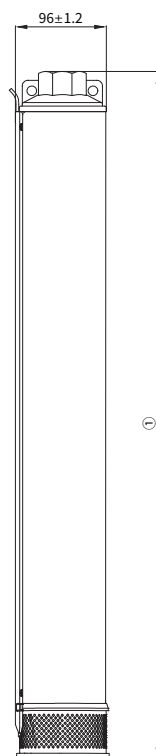

외형도 데이터 테이블

60Hz		60Hz	
모델명	① ±30(mm) 펌프 본체 길이	모델명	① ±30(mm) 펌프 본체 길이
PSB4-L2-11	480	PSB4-L5-35	1308
PSB4-L2-20	720	PSB4-L7-4	363
PSB4-L2-28	904	PSB4-L7-9	535
PSB4-L2-46	1383	PSB4-L7-13	705
PSB4-L3-9	442	PSB4-L7-22	1046
PSB4-L3-17	667	PSB4-L7-28	1252
PSB4-L3-24	836	PSB4-L9-3	346
PSB4-L3-40	1253	PSB4-L9-7	491
PSB4-L4-7	405	PSB4-L9-11	669
PSB4-L4-13	559	PSB4-L9-18	922
PSB4-L4-18	718	PSB4-L9-22	1100
PSB4-L4-31	1104	PSB4-L14-4	427
PSB4-L4-39	1315	PSB4-L14-7	567
PSB4-L5-6	394	PSB4-L14-12	837
PSB4-L5-11	535	PSB4-L14-16	1061
PSB4-L5-16	707	PSB4-L18-5	596
PSB4-L5-28	1104	PSB4-L18-11	1070

윌로 심정용 펌프 솔루션

4inch Borehole Pump Series



PSB4-L Series

모델선정표

출력 (HP)	모델명	단수	정격 유량	최대 양정	최대 유량	토출 구경	외형치수 (mm)		중량	양정별 양수량(m-m³/day)																											
			m³ /day	m	m³ /day	mm (inch)	직경	길이		kg	20	30	40	50	60	70	80	100	120	140	150	180	200	220	250	280	300	320	350	380	400	420	460				
1	PSB-10GP	14	50	130	84	32(1¼)	101	520	4.5			84	79	75	69	63	58	43																			
	PSB-10HP	8	115	80	156	32(1¼)		416	3.0	156	132	122	112	81	50																						
	PSB-10MP	6	187	49	238	40(1½)		393	2.5	238	202	122																									
	PSB4-L2-11	11	50	115	86	32(1¼)		491	4.5	86	81	76	70	64	58	50	31																				
	PSB4-L3-9	9	72	95	109	32(1¼)	96	445	4.0		109	102	91	80	69	54																					
	PSB4-L4-7	7	93	76	143	32(1¼)		409	3.5	143	130	115	97	76	43																						
	PSB4-L5-6	6	115	66	168	40(1½)		397	3.5	168	146	122	93	22																							
	PSB4-L7-4	4	158	43	202	40(1½)		366	3.5	202	150	29																									
PSB4-L9-3	3	216	29	202	50(2)	342	3.5	202																													
2	PSB-20GP	24	50	210	92	32(1¼)	101	774	6.0			92	89	86	82	79	72	66	58	55	30																
	PSB-20HP	13	115	125	173	32(1¼)		555	4.5		173	158	151	140	130	115	81																				
	PSB-20MP	10	187	81	266	40(1½)		523	3.5	266	245	219	189	153	107																						
	PSB-20QP	6	259	50	374	50(2)		550	5.5	374	288	187																									
	PSB4-L2-20	20	50	206	86	32(1¼)	96	742	6.5			86	83	80	77	74	67	60	52	48	32	14															
	PSB4-L3-17	17	72	177	112	32(1¼)		644	6.0				112	108	103	99	88	76	63	55																	
	PSB4-L4-13	13	93	139	140	32(1¼)		571	5.0			140	133	126	118	110	90	65																			
	PSB4-L5-11	11	115	119	166	40(1½)		543	4.5			166	154	140	127	112	74																				
	PSB4-L7-9	9	158	91	230	40(1½)		539	5.0		230	211	191	170	144	104																					
	PSB4-L9-7	7	216	64	293	50(2)		495	4.5	293	262	226	179	81																							
PSB4-L14-4	4	316	40	357	50(2)	453	4.5	357	173																												
3	PSB-30HP	17	115	165	173	32(1¼)	101	685	5.5			173	167	158	150	144	120	98	58																		
	PSB-30MP	14	187	113	266	40(1½)		656	4.5		266	245	232	212	189	163	101																				
	PSB-30QP	8	259	65	389	50(2)		830	6.5	389	346	295	230	130																							
	PSB4-L2-28	28	50	287	85	32(1¼)		936	8.5					85	82	80	76	72	67	65	57	51	45	33	14												
	PSB4-L3-24	24	72	256	115	32(1¼)	96	850	7.5					115	112	109	103	96	88	84	72	62	49														
	PSB4-L4-18	18	93	194	143	32(1¼)		737	6.5				143	138	133	127	116	103	88	80	43																
	PSB4-L5-16	16	115	174	172	40(1½)		689	6.0				172	164	155	147	128	108	84	65																	
	PSB4-L7-13	13	158	137	222	40(1½)		677	6.0				222	208	194	180	146	86																			
	PSB4-L9-11	11	216	105	310	50(2)		679	5.5	310	296	276	255	235	207	173	58																				
	PSB4-L14-7	7	316	67	461	50(2)		620	5.5	461	395	307	196	58																							
PSB4-L18-5	5	468	46	540	50(2)	565	5.5	540	360	162																											
5.5	PSB-55H	28	115	260	194	32(1¼)	101	980	9.0					194	187	184	173	166	156	144	130	127	85														
	PSB-55M	22	187	178	274	40(1½)		930	8.0			274	259	245	240	229	200	170	132	111																	
	PSB-55Q	13	259	110	403	50(2)		945	9.0		403	360	346	302	265	220																					
	PSB4-L2-46	46	50	480	84	32(1¼)		1,405	13								84	82	79	78	74	71	68	64	59	56	53	47	41	37	31	14					
	PSB4-L3-40	40	72	406	115	32(1¼)	96	1,248	11.5								115	111	108	106	101	96	91	84	77	72	66	56	44	32							
	PSB4-L4-31	31	93	312	139	32(1¼)		1,086	9.5									139	133	127	124	114	106	98	84	69	53	20									
	PSB4-L5-28	28	115	288	166	40(1½)		1,071	9.5									166	157	147	141	125	114	102	80	22											
	PSB4-L7-22	22	158	231	226	40(1½)		1,019	8.5								226	210	193	175	166	130	95	29													
	PSB4-L9-18	18	216	172	314	50(2)		945	8.0		314	303	293	282	270	258	232	195	139	97																	
	PSB4-L14-12	12	316	118	440	50(2)		931	7.5			440	399	354	304	238	86																				
7.5	PSB-75H	37	115	360	173	32(1¼)	101	1,250	10.5							173	166	156	150	144	132	127	115	108	86	72	58										
	PSB-75M	34	187	270	281	40(1½)		1,350	11				281	274	266	245	238	230	202	194	173	144	115														
	PSB4-L4-39	39	93	412	140	32(1¼)		1,333	12									140	136	133	126	121	115	107	97	89	82	70	52	22							
	PSB4-L5-35	35	115	360	168	40(1½)		1,307	11										168	161	157	145	136	127	114	99	89	73	22								
	PSB4-L7-28	28	158	295	227	40(1½)	96	1,226	10.5								227	214	202	195	174	158	141	102	29												
	PSB4-L9-22	22	216	208	311	50(2)		1,098	9.0			311	303	295	286	276	256	234	206	190	109	58															
	PSB4-L14-16	16	316	158	420	50(2)		1,155	9.0					420	389	353	272	168	41																		
PSB4-L18-11	11	468	93	569	50(2)	1,006	8.0				569	495	408	328	237																						

* PSB4(-L) 모델 전원사양

1~3HP : 단상 220V/삼상 220&380V, 60Hz

5.5~7.5HP : 삼상 380V, 60Hz

WILO SE

Wilopark 1

D-44263 Dortmund Germany

www.wilo.com

윌로펌프(주)

부산광역시 강서구 미음산단 1로 46

wilo.com/kr/ko/

제품 및 서비스 문의

1688-5890

